

| X88 | AC connector |
|------|--|
| A23 | Alarm system control module |
| 31 | Battery - |
| 30 | Battery + |
| B132 | Camshaft position (CMP) sensor |
| B54 | Crankshaft position (CKP) sensor |
| X1 | Data link connector (DLC) |
| A35 | Engine control module (ECM) |
| K46 | Engine control relay |
| B24 | Engine coolant temperature (ECT) sensor |
| Y104 | Evaporative emission (EVAP) canister purge valve |
| M12 | Fuel pump |
| K20 | Fuel pump relay |
| F | Fuse |
| B72 | Heated oxygen sensor (HO2S) |
| K94 | Heated oxygen sensor (HO2S) relay |
| Y99 | Idle air control (IAC) valve |
| T1 | Ignition coil |
| 15 | Ignition switch - ignition ON |
| S39 | Inertia fuel shut-off (IFS) switch |
| Y3 | Injector |
| A5 | Instrument panel |
| B25 | Intake air temperature (IAT) sensor |
| Y102 | Intake manifold air control solenoid |
| B30 | Mass air flow (MAF) sensor |
| S231 | Power steering pressure (PSP) switch |
| Y111 | Secondary air (AIR) solenoid (pulsed) |
| B147 | Throttle position (TP) sensor |
| B33 | Vehicle speed sensor (VSS) |
| | |

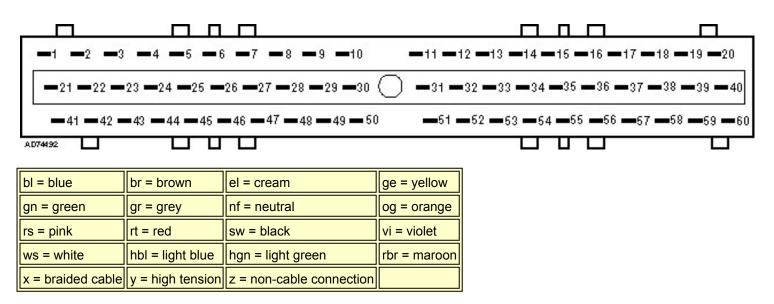

NOTE: In certain diagrams (Citroen, Peugeot & Renault), colour codes are replaced by numbers which are used to identify a particular cable and not the colour. In this instance, the cables will be numbered at each end close to the harness connector.

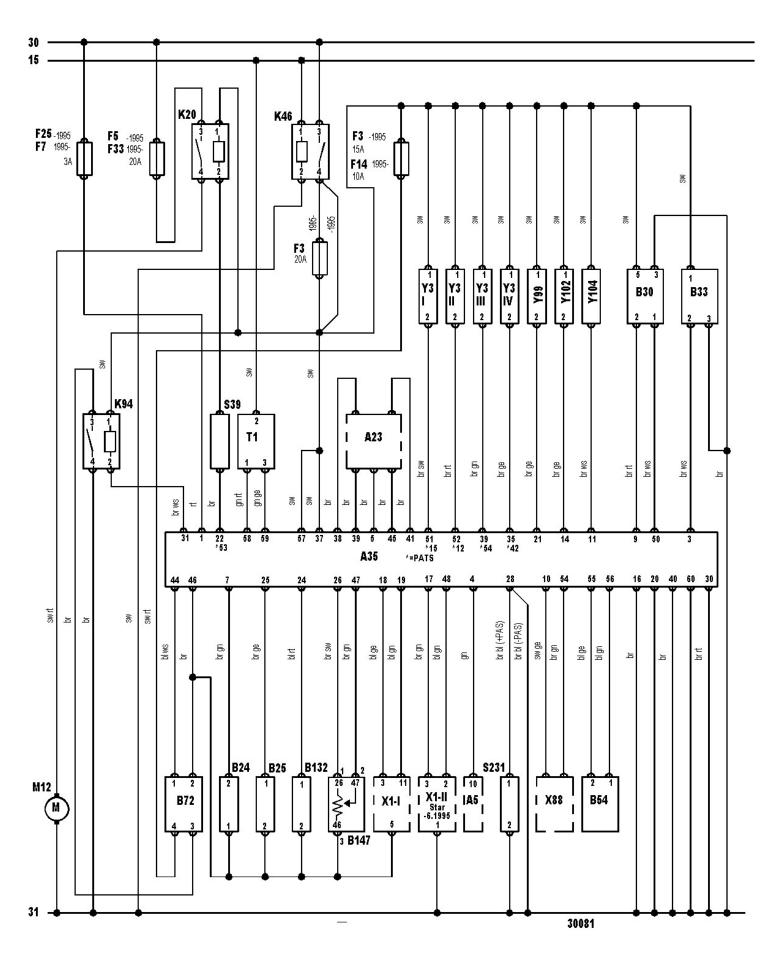

Model: Escort ('91) 1,8 Output: 96 (130) 6250 Year: 1992-97 © Autodata Limited 2007 26/02/2008 V6 410- /Autodata .